

Flexible Conduit Connection Assembly For Compression Fittings

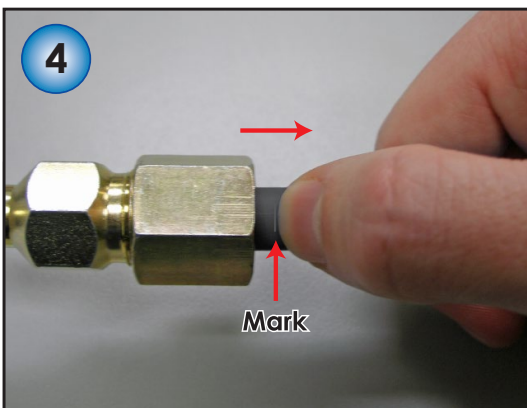


Trim the conduit to length by making a straight cut. Be sure to leave some slack when running the conduit to your wire feeder.



Use a tapered stone grinder tool to remove the burrs and sharp edges in the conduit as shown.

3 Connect the compression fitting as shown and firmly hand-tighten. Be sure to **push the conduit all the way into the connector until it bottoms out.**











Make a pencil mark on the conduit at the end of the connector. Pull the conduit out from the end of the connector approx. 3/16" to 1/4" (5 - 6 mm).





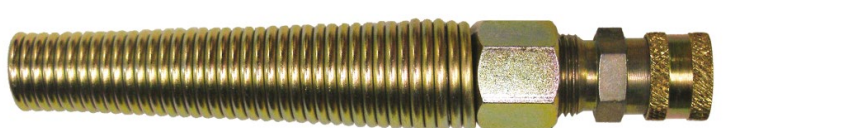

Firmly tighten the connector using two wrenches. Before use, ensure the conduit cannot be easily pulled out by hand. Attach to wire feeder.

Last Revised: 7/20/15

COMPRESSION STYLE FITTINGS *For Extra Flexible Conduit*

FC-X-SW .090 ID x .353 OD (2.3mm ID x 9mm OD)			A-10C-S
FC-X .198 ID x .500 OD (5mm ID x 12.7mm OD)			A-10C-X
FC-XH .250 ID x .610 OD (6.4mm ID x 15.5mm OD)			A-10R
FC-XH-LW .354 ID x .750 OD (9mm ID x 19mm OD)			A-9/A-6HD 0.375" ID A-6HD

STRAIN RELIEF CONNECTORS *For Extra Flexible Conduit*

FC-X-SW		A-10C-X-SR
FC-X		A-10R-SR
FC-XH		A-10R-QD-SR
FC-XH-LW		

-ST (one end) or -ST2 (both ends) Polymer Strain Relief
Available for all conduit sizes

Last Revised: 7/20/15