


Kit # WDK-ADM-1

For applications using up to 1/16" (1.6mm) **non-ferrous or aluminum wire** in fiber drum or box packaging

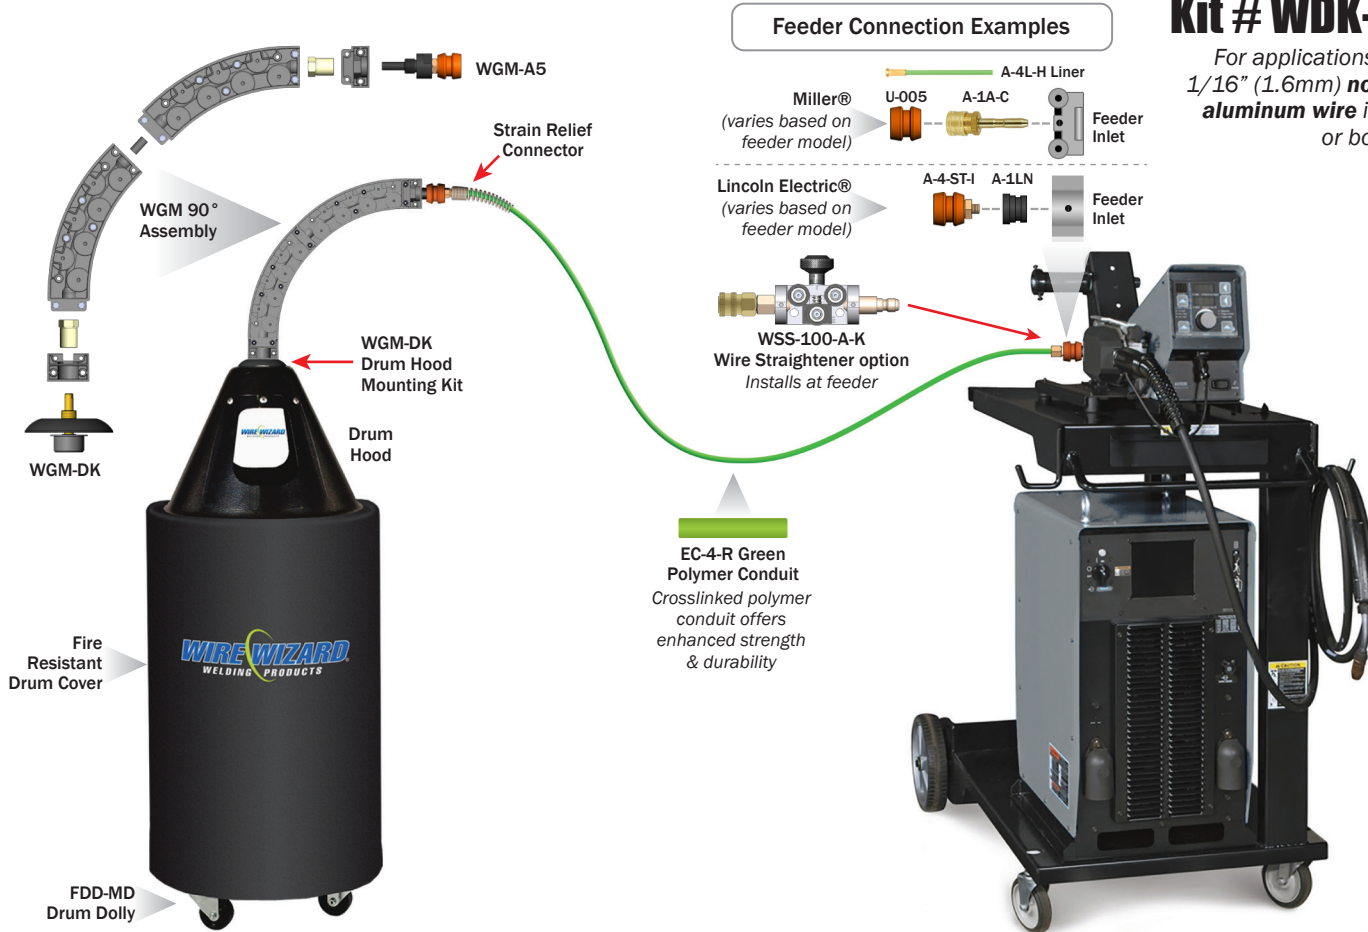

Non-ferrous/Aluminum Wire Delivery Kit WDK-ADM-1 Parts List:

Part #	Description	Quantity of Kits with Selected Options Required:	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	No drum dolly needed	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:		1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:		1
WGM-DK	Wire Wizard® Guide Module Drum Hood Mounting Kit		1
WGM-1	Wire Wizard® Guide Modules (45° sections)		2
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect		1
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)		1
Select Option >>	Conduit Options:	Custom Length: FT	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:		1

Optional Accessories

A-4L-H	Connector Liner to protect non-ferrous wires from touching steel connection points	Quantity Required:
WSS-100-A-K	Wire Straightener for Non-ferrous Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	