

ITEMS NEEDED

- ▶ (2) WGM-1 (45-degree Guide Module)
- ▶ (1) WGM-ECK-50 (End Cap Kit)
- ▶ (1) WGM-FLM-1 (Floor/Wall Mount Bracket)
- ▶ (2) WGM-A5 (Connectors)
- ▶ (2) M5 x .8 x 50mm (inc. with WGM-FLM-1)
- ▶ (2) Anchors or mounting bolts
- ▶ (2) 8mm wrenches

ASSEMBLY STEPS

1. Combine two WGM-1 modules using the provided fasteners and pilot pin inserted between modules. Install WGM-ECK-50 end caps on ends of modules using the provided fasteners (see Wire Guide Module assembly instructions for details).
2. Mount WGM-FLM-1 to floor or other structure, with the two slotted ends standing upright as shown in Figure 1.
3. Determine the desired mounting orientation, with the Guide Module assembly on the inside, outside, or one on each side. See mounting options below.
4. Align one through-hole on the Guide Module assembly with the bottom slot on top, then the second with the slot on the bottom.
5. Insert WGM-FLM-1 hardware with a washer on both ends and tighten as shown in Figure 2.
6. Thread-in WGM-A5 or other desired connector and attach conduit.

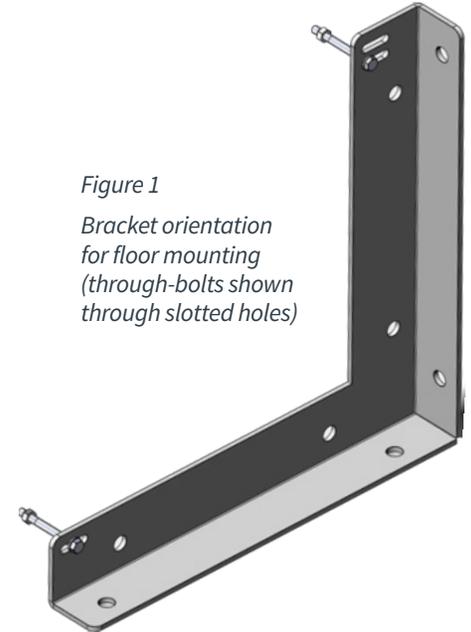


Figure 1
Bracket orientation
for floor mounting
(through-bolts shown
through slotted holes)


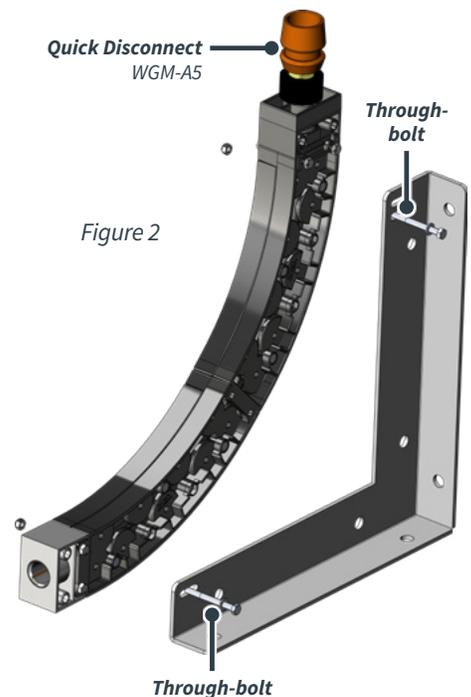



Figure 2

GUIDE MODULE MOUNTING OPTIONS

Guide Module
installation on
outside of bracket

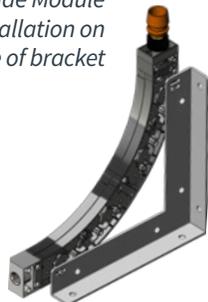

Guide Module
installation on
outside of bracket

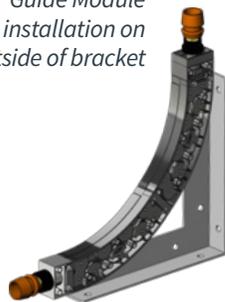

Guide Module
assemblies
installed on each
side of the bracket
(requires two M5 x
.8 x 90mm bolts)

